


Technical Notice

The ribbon cables furnished with many I/O cards and motherboards have two different wiring configurations.

These cables are made of 10-conductor flat ribbon cable terminated in a Berg-type connector on one end and a DB-25 or a DB-9 at the other end.

Be sure to check the cables if you are having trouble. We have even seen the wrong cables shipped with the card!

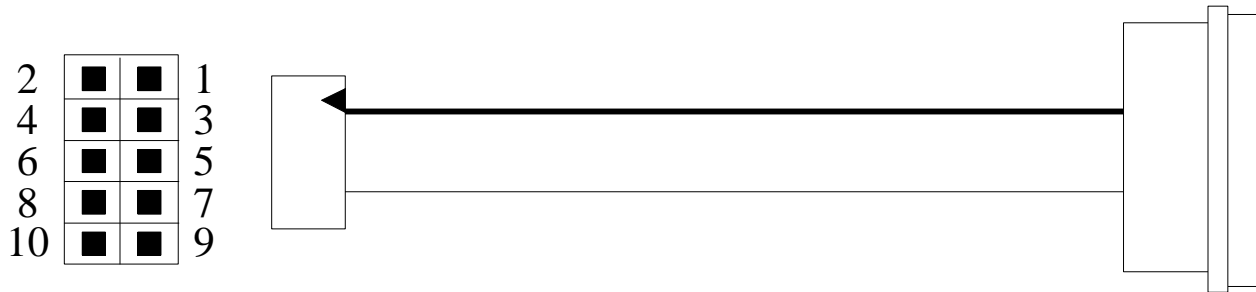

Style "A"

Berg Pin	Dir	DB-9 Pin	DB-25 Pin	Signal Name
1	<	1	8	DCD
2	<	2	3	Rx
3	>	3	2	Tx
4	>	4	20	DTR
5	=	5	7	Gnd
6	<	6	6	DSR
7	>	7	4	RTS
8	<	8	5	CTS
9	<	9	22	RI
10		N/C	N/C	

Style "B"

Berg Pin	Dir	DB-9 Pin	DB-25 Pin	Signal Name
1	<	1	8	DCD
2	<	6	6	DSR
3	<	2	3	Rx
4	>	7	4	RTS
5	>	3	2	Tx
6	<	8	5	CTS
7	>	4	20	DTR
8	<	9	22	RI
9	=	5	7	Gnd
10	=	N/C	1	Frame